


Bench- / floor scale (triple range)

Series WPI-T

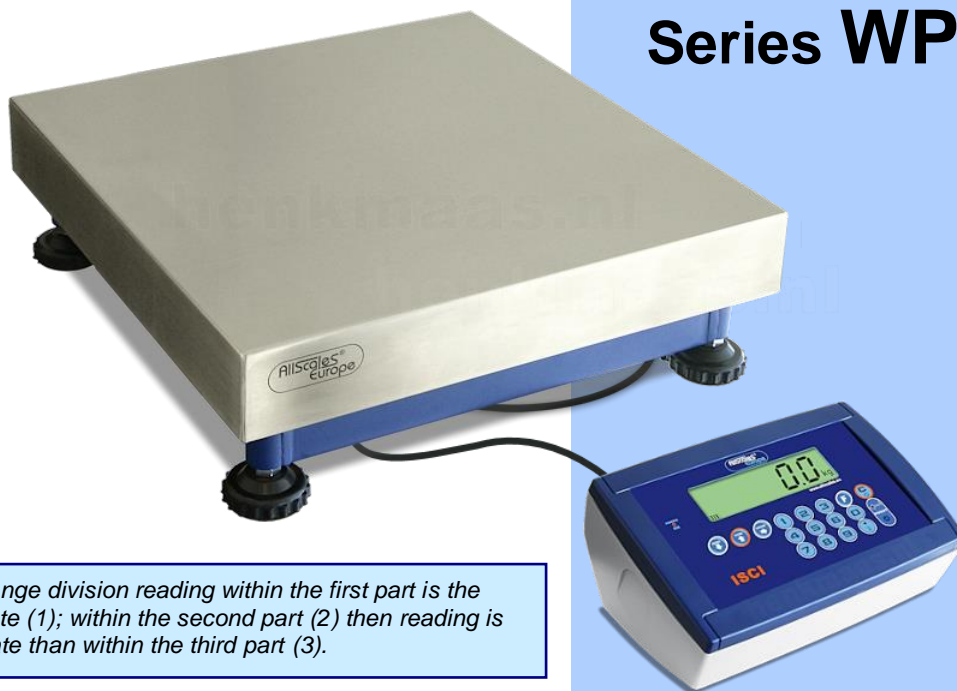

* With triple range division reading within the first part is the most accurate (1); within the second part (2) then reading is more accurate than within the third part (3).

Options i.a.

- real time clock
- IR remote control
- thermal ticketprinter Citizen
- cable from RS-232 to PC/printer
- wireless communication with PC-printer
- module with 2 opto-isolated digital inputs / 2 photomofet outputs, applicable as settable setpoints / 1,5 m. cord (not in combination with. alibi memory)
- alibi memory with date/time, max. 120.000 weighings
- radio interface for wireless communication with PC/printer and indicator
- ethernet interface + ethernet cablel (1,5 m)
- LED-tower (red-orange-green) as optical indication with check weighing
- entirely stainless steel version IP67

Properties

- excellent price / quality linking
- CE verified, **triple range division**
- stainless steel platform; stove enamelled base frame
- included separate weight indicator, model ISCS in ABS plastic housing, protection class **IP65**
- water protected flat keypad , 17 function keys
- clearly readable, backlit LCD-display, 25 mm character height
- net/gross indication in kg or lb; accumulated weighing, formula weighing, percentage weighing, alibi memory (option), piece counting, hold function, peak level indication, network function up to 4 indicators
- 2x RS-232/C port; IR-input for optional remote control
- power: internal rechargeable battery (approx. 60 hours operation time) and internal charger with solid 230v mains cord

type	WP-IT-30-6	WP-IT-30-15	WP-IT-30-30	WP-IT-40-30	WP-IT-40-60
capacity	6 kg	15 kg	30 kg	30 kg	60 kg
division 1*	0-1.5 kg / 0,5 g	0-3 kg / 1 g	0-6 kg / 2 g	0-6 kg / 2 g	0-15 kg / 5 g
division 2*	1.5-3 kg / 1 g	3-6 kg / 2 g	6-15 kg / 5 g	6-15 kg / 5 g	15-30 kg / 10 g
division 3*	3-6 kg / 2 g	6-15 kg / 5 g	15-30 kg / 10 g	15-30 kg / 10 g	30-60 kg / 20 g
Platform dim.	300 x 300 mm			400 x 400 mm	

type	WP-IT-40-150	WP-IT-50-60	WP-IT-50-150	WP-IT-60-60	WP-IT-60-150
capacity	150 kg	60 kg	150 kg	60 kg	150 kg
division 1*	0-30 kg / 10 g	0-15 kg / 5 g	0-30 kg / 10 g	0-15 kg / 5 g	0-30 kg / 10 g
division 2*	30-60 kg / 20 g	15-30 kg / 10 g	30-60 kg / 20 g	15-30 kg / 10 g	30-60 kg / 20 g
division 3*	60-150 kg / 50 g	30-60 kg / 20 g	60-150 kg / 50 g	30-60 kg / 20 g	60-150 kg / 50 g
Platform dim.	400 x 400 mm	500 x 500 mm		600 x 600 mm	